



SIS - Standardiseringskommissionen i Sverige

Handläggande organ

SMS, SVERIGES MEKANSTANDARDISERING

SVENSK STANDARD SS-ISO 3442

Fastställd

Utgåva

Sida

Registrering

1992-01-29

1

1 (1 + 16)

SMS reg 49.7124

SIS FASTSTÄLLER OCH UTGER SVENSK STANDARD SAMT SÄLJER NATIONELLA OCH INTERNATIONELLA STANDARDPUBLIKATIONER ©

Verktygsmaskiner — Självcentrerande chuckar med delade backar av typ tunga och spår — Storlekar för utbytbarhet och specifikation för acceptansk kontroll

Denna standard utgörs av den engelska versionen av den internationella standarden ISO 3442:1991.

Mått angivna i tum i ISO 3442:1991 ingår inte i standarden.

Self-centring chucks for machine tools with two-piece jaws (tongue and groove type) — Sizes for interchangeability and acceptance test specifications

This Swedish standard consists of the English version of the International Standard ISO 3442:1991.

Dimensions given in inches in ISO 3442:1991 have been deleted from this standard.

UDK 621.9-229.323.2

Standarder kan beställas hos SIS som även lämnar allmänna upplysningar om svensk och utländsk standard.
Postadress: SIS, Box 3295, 103 66 STOCKHOLM
Telefon: 08 - 613 52 00. Telefax: 08 - 11 70 35

Upplysningar om **sakinnehållet** i standarden lämnas av SMS.
Telefon: 08 - 783 83 00. Telefax: 08 - 667 85 42

Prisgrupp N

Tryckt i mars 1992

INTERNATIONAL STANDARD

**ISO
3442**

Second edition
1991-09-15

Self-centring chucks for machine tools with two-piece jaws (tongue and groove type) — Sizes for interchangeability and acceptance test specifications

*Mandrins pour machines-outils, à serrage concentrique et à mors
rapportés (assemblage cruciforme par tenon et languette) — Dimensions
d'interchangeabilité et conditions de réception*



Reference number
ISO 3442:1991(E)

ISO 3442:1991(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 3442 was prepared by Technical Committee ISO/TC 39, *Machine tools*, Sub-Committee SC 8, *Chucks*.

This second edition cancels and replaces the first edition (ISO 3442:1975), which has been technically revised.

© ISO 1991

All rights reserved. No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

Introduction

This International Standard is one of a series relating to self-centring chucks with two-piece jaws; however, only types in common use are covered.

Because of its wide usage, the type called "tongue and groove" has been made the subject of this International Standard.

Self-centring chucks for machine tools with two-piece jaws (tongue and groove type) — Sizes for interchangeability and acceptance test specifications

1 Scope

This International Standard specifies the sizes for interchangeability, and describes, with reference to ISO 230-1, the geometrical tests on self-centring chucks with two-piece jaws and the corresponding permissible deviations which apply.

It deals only with the inspection of rotational accuracy of the chuck and the positioning of the assembling elements of top jaws. It does not apply to other dynamic qualities, such as measurement of lack of balance during rotation, balancing or measurement of gripping power.

2 Normative reference

The following standard contains provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the edition indicated was valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent edition of the standard indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 230-1:1986, *Acceptance code for machine tools — Part 1: Geometric accuracy of machines operating under no-load or finishing conditions.*

3 Preliminary remarks

3.1 Sizes for interchangeability

Although the internal mounting parts and the fixing screws are not mutually interchangeable, depending on whether they are manufactured in conformity with the metric sizes or the inch sizes, there is direct interchangeability for the same type between the base or master jaws in metric sizes and top jaws in inches, or vice versa.

3.2 Acceptance test specifications

According to the type of chuck under consideration, i.e. hand- or power-operated, the main purpose of these tests is to allow either top jaw mounting compatible with the machining accuracy of the chuck or a precise setting for top jaws on the chuck after carrying out preliminary centring, straightening or locking operations on a jig separate from the machine.

ISO 3442:1991(E)

4 Precision classes

Two precision classes are specified, namely

- class I, corresponding to precision chucks;
- class II, corresponding to normal accuracy chucks.

For purposes of information, and particularly concerning class I power-operated chucks, it should be noted that these can be provided, if necessary, with specially adjusted base or master jaws which are not interchangeable with other base or master jaws. In this case, chucks shall be marked.

5 Sizes for interchangeability

The sizes for interchangeability are shown in figure 1 and are given in 5.1 and 5.2, respectively, for hand-operated chucks and power-operated chucks.

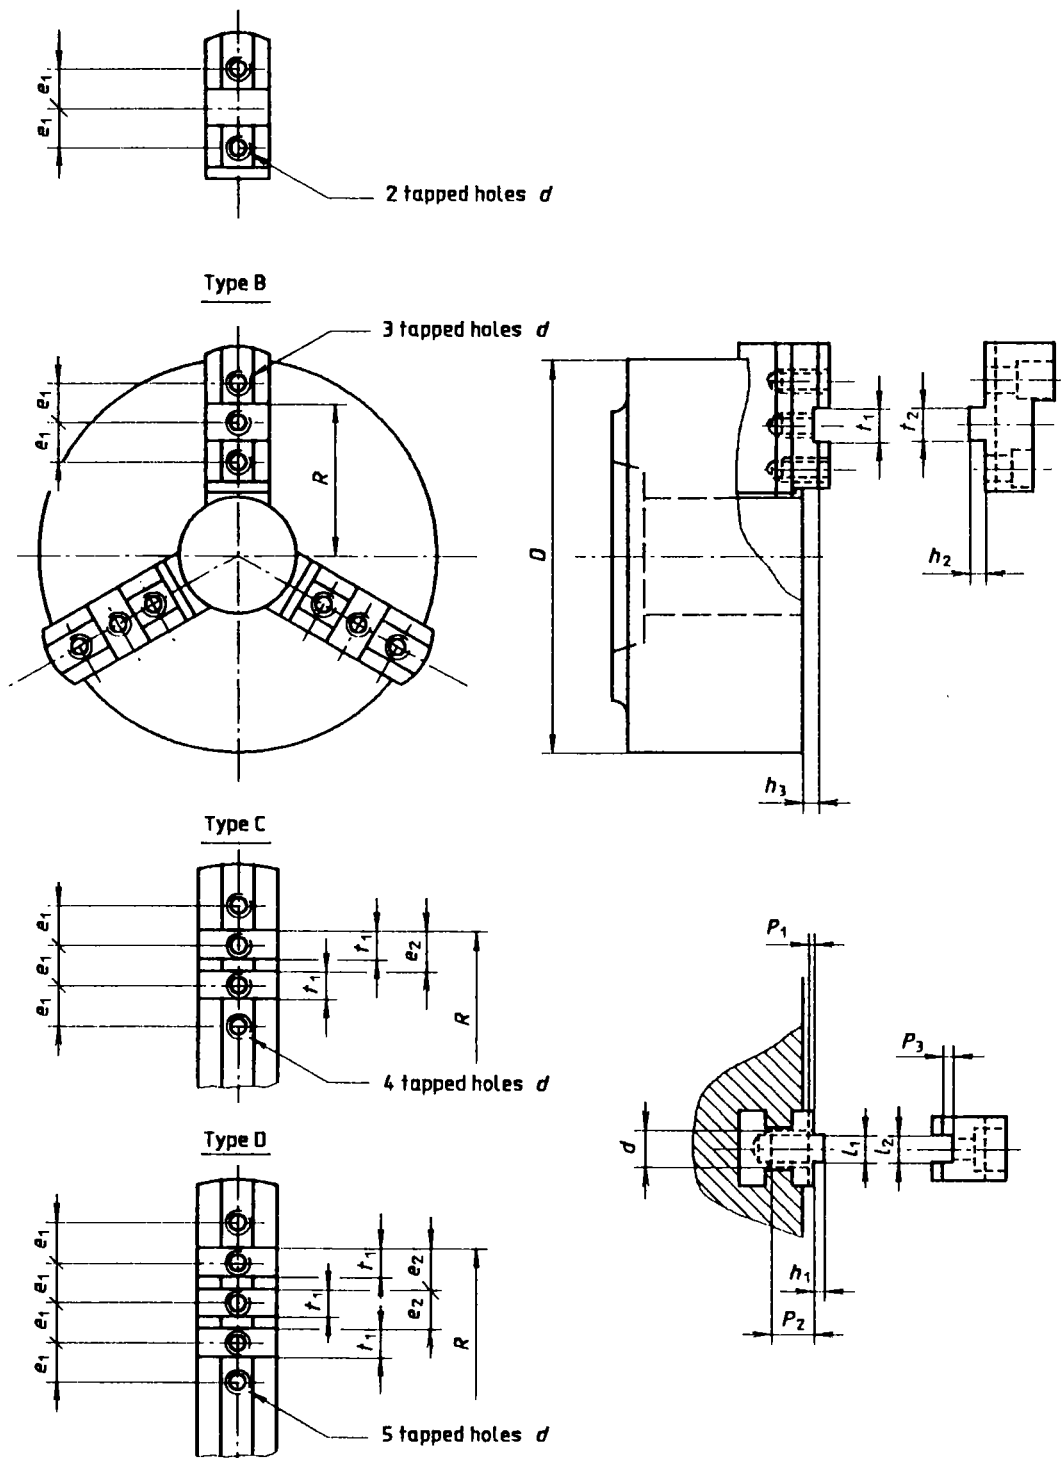


Figure 1

ISO 3442:1991(E)

5.1 Hand-operated chucks

The sizes for interchangeability for hand-operated chucks are given in table 1 (metric) and in table 2 (inches).

Table 1

Dimensions in millimetres

Nominal diameter of chuck, D_{nom}	100	125	160	200	250	315	400	500	630	800	1 000
Type	A	A	A	A	A	B	B	C	D	D	D
$D \pm 5\%$	100	125	160	200	250	315	400	500	630	800	1 000
Base or master jaw											
d	M6	M8	M10	M10	M12	M12	M16	M20	M20	M20	M20
$e_1 \pm 0,15$	9,5	11,1	19	22,2	27	31,75	38,1	38,1	38,1	38,1	38,1
e_2	—	—	—	—	—	—	—	38,1	38,1	38,1	38,1
h_1	2,2	2,2	3	3	3	3	3	3	3	3	3
h_3 min.	4	4	5	5	5	5	8	8	8	8	8
l_1 h9	6,35	6,35	7,94	7,94	12,7	12,7	12,7	12,7	12,7	12,7	12,7
P_1	3,2	3,2	4	4	4	4	7	7	7	7	7
P_2	9	13	18	18	20	20	28	33	33	33	33
t_1 H8	9,525	9,525	12,675	12,675	19,025	19,025	19,025	19,025	19,025	19,025	19,025
Top jaw											
h_2	2,2	2,2	3	3	3	3	6	6	6	6	6
l_2 E9	6,35	6,35	7,94	7,94	12,7	12,7	12,7	12,7	12,7	12,7	12,7
P_3	3,2	3,2	4	4	4	4	4	4	4	4	4
t_2 h8	9,525	9,525	12,675	12,675	19,025	19,025	19,025	19,025	19,025	19,025	19,025

Table 2

Dimensions in inches

Nominal diameter of chuck, D_{nom}	4	5	6	8	10	12	15	18	21	24	28	32	36
Type			A	A	A	B	B	C	D	D	D	D	D
$D \pm 5\%$	4	5	6	8	10	12	15	18	21	24	28	32	36
Base or master jaw													
d	0,250	0,312	0,375	0,375	0,500	0,500	0,625	0,750	0,750	0,750	0,750	0,750	0,750
UNC-3B	-20	-18	-16	-16	-13	-13	-11	-10	-10	-10	-10	-10	-10
$e_1 \pm 0,006$	0,375	0,437	0,750	0,875	1,062	1,250	1,500	1,500	1,500	1,500	1,500	1,500	1,500
e_2	--	--	--	--	--	--	--	1,500	1,500	1,500	1,500	1,500	1,500
h_1	max.	0,10	0,10	0,14	0,14	0,14	0,14	0,14	0,14	0,14	0,14	0,14	0,14
	min.	0,08	0,08	0,12	0,12	0,12	0,12	0,12	0,12	0,12	0,12	0,12	0,12
h_3	0,16	0,16	0,20	0,20	0,20	0,20	0,32	0,32	0,32	0,32	0,32	0,32	0,32
l_1	max.	0,250	0,250	0,312	0,312	0,500	0,500	0,500	0,500	0,500	0,500	0,500	0,500
	min.	0,248	0,248	0,310	0,310	0,498	0,498	0,498	0,498	0,498	0,498	0,498	0,498
P_1	max.	0,13	0,13	0,18	0,18	0,18	0,18	0,30	0,30	0,30	0,30	0,30	0,30
	min.	0,11	0,11	0,16	0,16	0,16	0,16	0,28	0,28	0,28	0,28	0,28	0,28
P_2	0,35	0,51	0,65	0,65	0,80	0,80	1,10	1,30	1,30	1,30	1,30	1,30	1,30
l_1	max.	0,375	0,375	0,500	0,500	0,750	0,750	0,750	0,750	0,750	0,750	0,750	0,750
	min.	0,374	0,374	0,499	0,499	0,749	0,749	0,749	0,749	0,749	0,749	0,749	0,749
Top jaw													
h_2	max.	0,10	0,10	0,12	0,12	0,12	0,12	0,25	0,25	0,25	0,25	0,25	0,25
	min.	0,08	0,08	0,10	0,10	0,10	0,10	0,23	0,23	0,23	0,23	0,23	0,23
l_2	max.	0,253	0,253	0,315	0,315	0,503	0,503	0,503	0,503	0,503	0,503	0,503	0,503
	min.	0,251	0,251	0,313	0,313	0,501	0,501	0,501	0,501	0,501	0,501	0,501	0,501
P_3	max.	0,13	0,13	0,17	0,17	0,17	0,17	0,17	0,17	0,17	0,17	0,17	0,17
	min.	0,11	0,11	0,15	0,15	0,15	0,15	0,15	0,15	0,15	0,15	0,15	0,15
l_2	max.	0,374	0,374	0,499	0,499	0,749	0,749	0,749	0,749	0,749	0,749	0,749	0,749
	min.	0,373	0,373	0,498	0,498	0,748	0,748	0,748	0,748	0,748	0,748	0,748	0,748