



SIS - Standardiseringskommissionen i Sverige

Handläggande organ

SMS, SVERIGES MEKANSTANDARDISERING

SVENSK STANDARD SS-ISO 9367-2

Fastställt

1994-05-27

Utgåva

1

Sida

1 (1 + 24)

SIS FASTSTÄLLER OCH UTGER SVENSK STANDARD SAMT SÄLJER NATIONELLA OCH INTERNATIONELLA STANDARDPUBLIKATIONER ©

Vägfordon — Säkring av fordon för sjötransport på Ro/Ro-fartyg — Allmänna krav — Del 2: Pånhängsvagnar

Den internationella standarden ISO 9367-2:1994 gäller som svensk standard. Detta dokument innehåller den officiella engelska versionen av ISO 9367-2:1994.

Motsvarigheten och aktualiteten i svensk standard till de publikationer som omnämns i denna standard framgår av "Katalog över svensk standard", som årligen ges ut av SIS. I katalogen redovisas internationella och europeiska standarder som fastställts som svenska standarder och övriga gällande svenska standarder.

Lashing and securing arrangements on road vehicles for sea transportation on Ro/Ro ships — General requirements — Part 2: Semi-trailers

The International Standard ISO 9367-2:1994 has the status of a Swedish Standard. This document contains the official English version of ISO 9367-2:1994.

Swedish Standards corresponding to documents referred to in this Standard are listed in "Catalogue of Swedish Standards", annually issued by SIS. The Catalogue lists, with reference number and year of Swedish approval, International and European Standards approved as Swedish Standards as well as other Swedish Standards.

INTERNATIONAL STANDARD

ISO
9367-2

First edition
1994-01-15

Lashing and securing arrangements on road vehicles for sea transportation on Ro/Ro ships — General requirements —

Part 2: Semi-trailers

*Dispositifs d'arrimage et de saisissage des véhicules routiers en transport
maritime sur navires rouliers — Conditions générales —*

Partie 2: Semi-remorques



Reference number
ISO 9367-2:1994(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 9367-2 was prepared by Technical Committee ISO/TC 22, *Road vehicles*.

ISO 9367 consists of the following parts, under the general title *Lashing and securing arrangements on road vehicles for sea transportation on Ro/Ro ships — General requirements*:

- *Part 1: Commercial vehicles and combinations of vehicles, semi-trailers excluded*
- *Part 2: Semi-trailers*

Annexes A, B and C of this part of ISO 9367 are for information only.

© ISO 1994

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

Lashing and securing arrangements on road vehicles for sea transportation on Ro/Ro ships — General requirements —

Part 2: Semi-trailers

1 Scope

This part of ISO 9367 specifies the minimum requirements to allow efficient lashing and securing of semi-trailers, as defined in ISO 3833, on board roll-on/roll-off (Ro/Ro) ships, indicating in particular the lashing arrangements on the semi-trailer and the securing method to be used. It also gives, in annex A, for information to semi-trailer designers, the securing point arrangements generally used on Ro/Ro ships as laid down by International Maritime Organization (IMO) recommendations. In annex B, it gives for information some design indications to decrease damage during handling.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO 9367. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO 9367 are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 1726:1989, *Road vehicles — Mechanical coupling between tractors and semi-trailers — Interchangeability.*

ISO 3833:1977, *Road vehicles — Types — Terms and definitions.*

3 Definitions

For the purposes of this part of ISO 9367, the following definitions apply.

3.1 Ro/Ro ship: Ship, normally not transversely subdivided, with one or more decks, closed or open, generally running the entire length of the ship, on which goods can be loaded by means of ramps and/or lifts. The cargo is

- either self-moving, on road vehicles including road tank vehicles, semi-trailers, trailers, rolling pallets and similar cargo transport units,
- or transported on loading vehicles moving between ship and shore.

[ISO 9367-1:1989, definition 3.1]

3.2 semi-trailer: Trailer which is designed to be coupled to a semi-trailer towing vehicle and to impose a substantial part of its total weight on the towing vehicle.

[ISO 3833:1977, definition 3.2.2]

3.3 lashing point: That part on a semi-trailer to which a lashing may be directly attached and which meets the requirements of this part of ISO 9367. [Adapted from ISO 9367-1:1989, definition 3.4]

4 Lashing points

4.1 General requirements

Lashing points shall be designed to enable the semi-trailer to be secured to the ship.

Each lashing point shall be designed for one lashing only. Lashing points may be either hinged, fixed or swivelling.

4.2 Number of lashing points

The same number of lashing points shall be provided on each side of the semi-trailer.

Semi-trailers with a gross mass above 20 tons and up to 40 tons shall be fitted with at least four pairs of lashing points. For semi-trailers with lower or higher gross mass, the manufacturers shall provide a suitable number of lashing points.

It is essential that semi-trailers with a box body (e.g. reefer body) or tank body which has, integral with the body or tank structure, an upper fifth-wheel plate and a king-pin at the front end, with a subframe to support the running gear at the rear, with no chassis as such between these two units, shall be fitted with the same number of lashing points to meet the strength requirement.

4.3 Location

4.3.1 Lashing points shall be located within defined areas on the semi-trailer. The allowable vertical and transverse areas on laden semi-trailers are shown in figure 1 and the longitudinal positions are shown in figure 2. For air-suspended semi-trailers, the figures apply to the Ro/Ro position (see 7.2).

The preferable position of the rear pair of lashing points is 300 mm ± 300 mm (datum line) from the rearmost part of the semi-trailer. The two pairs at the front shall be positioned with one pair in front of and one pair behind the trestle position at a distance *l*, calculated in accordance with the formula in 4.3.2, from the rearmost pair of lashing points, but shall not protrude below the upper fifth-wheel plate. This longitudinal placing of the lashing points corresponds to a distance of 2 500 mm between the longitudinal lashing points on the ship's deck. When necessary due to practical or structural restraints of the semi-trailer construction, the rearmost lashing points can, alternatively, be positioned in accordance with figure

2 d) or 2 e). Using a datum of 300 mm ± 300 mm from the rearmost part of the semi-trailer, the front lashing points can be calculated at a distance *l* as described above.

The remaining pair of lashing points shall be located in accordance with the alternative figure 2 a), 2 b) or 2 c).

4.3.2 For the total length of a semi-trailer above 8 250 mm, *l* in figure 2, in millimetres, is given by

$$l = 625 + (n \times 1\,250) \text{ mm}$$

where *n* is the number of intervals.

Values for length *l* are given in table 1.

Table 1 — Length *l*

Number of intervals <i>n</i>	<i>l</i> in figure 2 mm
3	4 375
4	5 625
5	6 875
6	8 125
7	9 375
8	10 625
9	11 875
10	13 125
11	14 375

It is recommended that these specifications be applied to all types of semi-trailers. However, if it is difficult to comply with these specifications for the two front pairs of lashing points due to special design of the base structure, the front pairs should preferably be located according to figure 3. When necessary due to practical or structural restraints of semi-trailer construction, the foremost lashing point can alternatively be located at the front end of the trailer.

4.4 Free space around lashing points

To allow flexibility in the longitudinal stowage of the semi-trailer on the ship's deck, free sectors as large as possible should be provided around the lashing points. For alternative stowage positions, see the examples in annex C.

Dimensions in millimetres







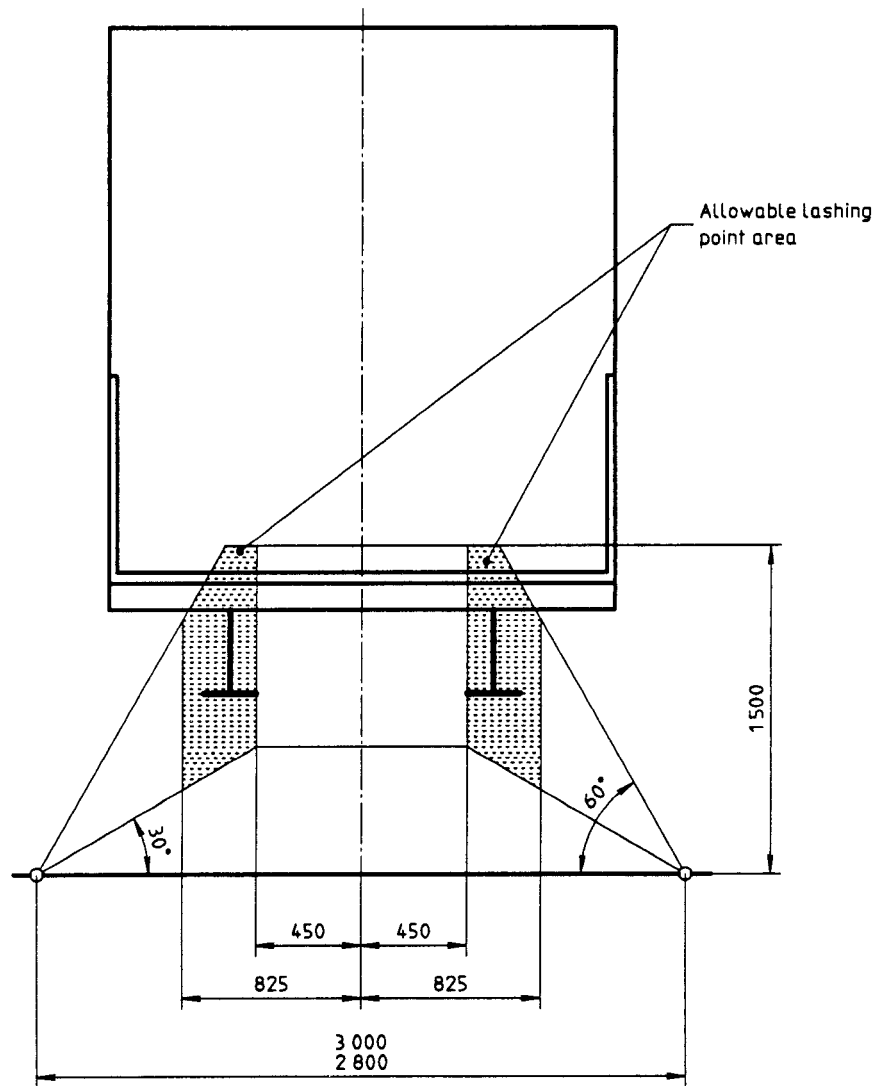


Figure 1 — Allowable vertical and transverse lashing point areas on laden semi-trailers

Dimensions in millimetres

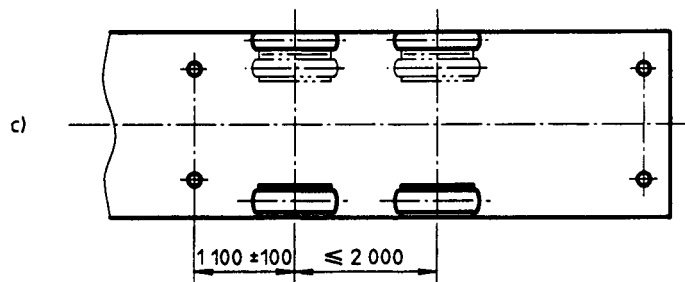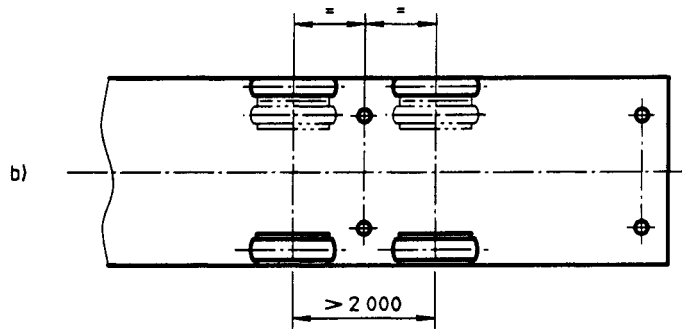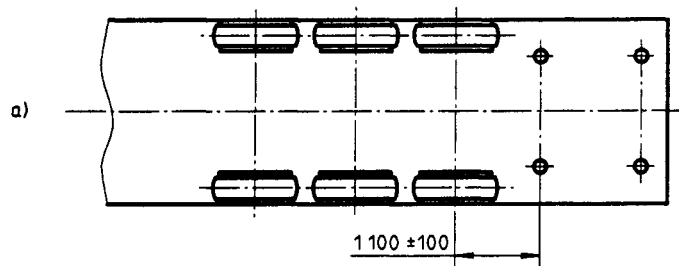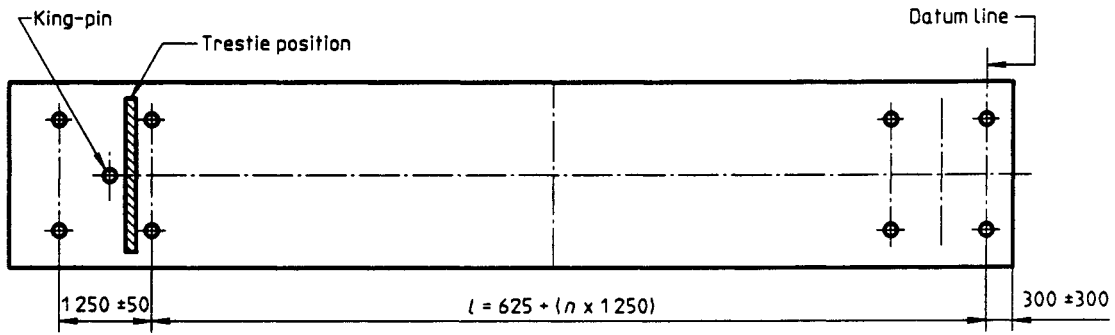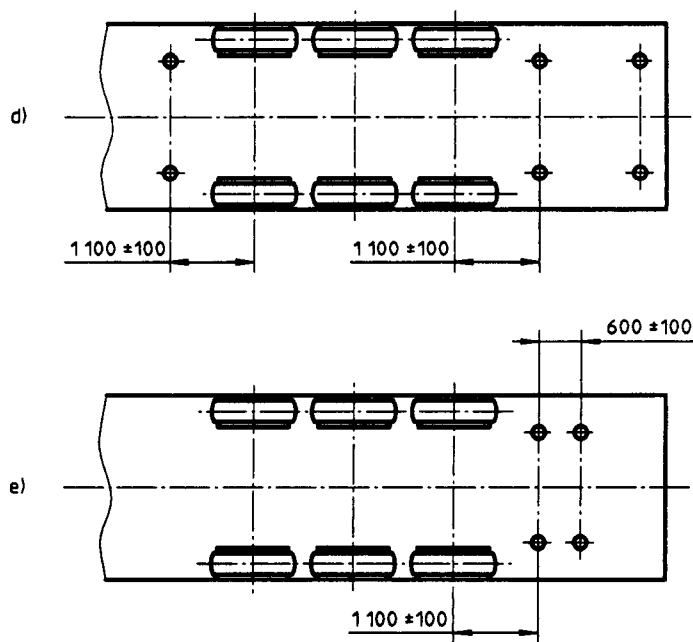

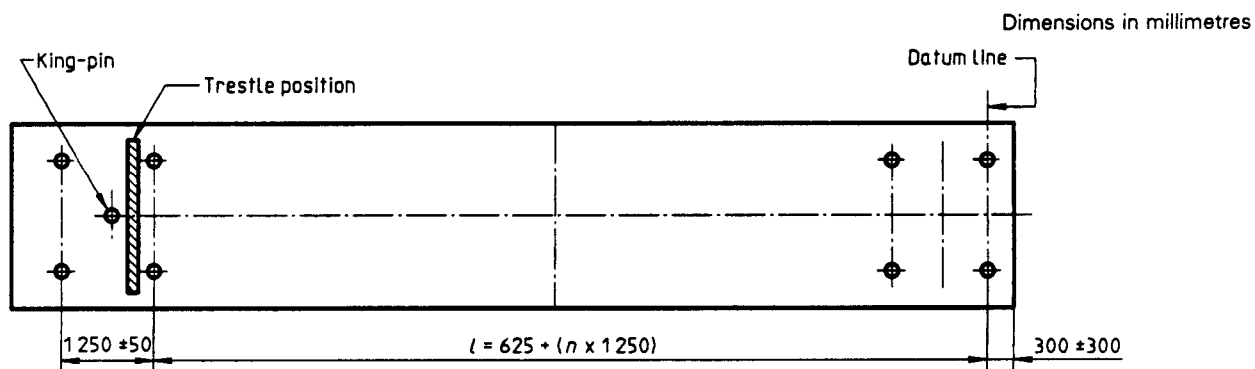

NOTE — Figures 2 d) and 2 e) show tandem or tri-axle layout.

Figure 2 — Longitudinal positions of lashing points

Dimensions in millimetres

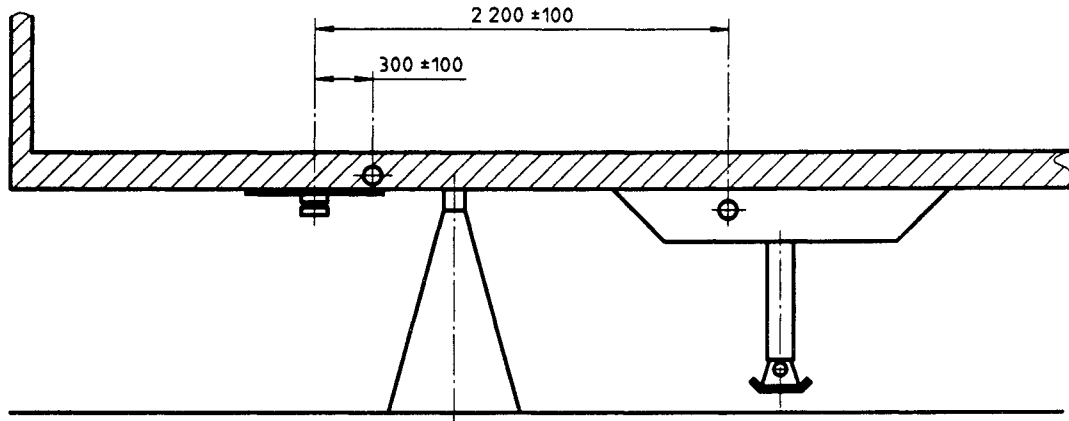


Figure 3 — Semi-trailers with box body or tank body — Front pairs of lashing points

4.5 Free passage and hook opening

Each lashing point shall allow the free passage inside it of a circle of at least 80 mm diameter, but the aperture need not be circular. The thickness of the lashing point material shall allow engagement of a hook of at least 25 mm opening (see figure 4). For hinged or swivelling lashing points, dimension *d* may exceed 25 mm.

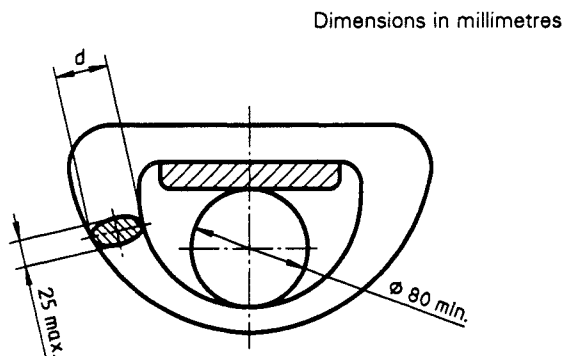


Figure 4 — Free passage and lashing point material thickness

4.6 Strength and testing of lashing points

4.6.1 Strength requirement

There shall be no deformation, breaks or cracks that could affect the function of the lashing points after testing to 120 kN in accordance with 4.6.2.

4.6.2 Check

The strength of the lashing points shall be checked either by calculation or by a static test carried out in accordance with 4.6.3. Other test methods may be used if an efficiency at least equivalent can be proved.

4.6.3 Static test

The value of the test force, *F*, to be used is 120 kN.

Apply the test force in the plane passing through the lashing point and forming an angle of 60° with the horizontal plane passing through this point, at 60° to the transverse plane (plane perpendicular to the longitudinal median plane of the vehicle — see figure 5).

5 Trestle location

The trestle should be located, if possible, within the range of the horizontal plane of the goose-neck contour as specified in ISO 1726 and as shown in figure 6.

No vertical force should go into the fifth wheel coupling pin.

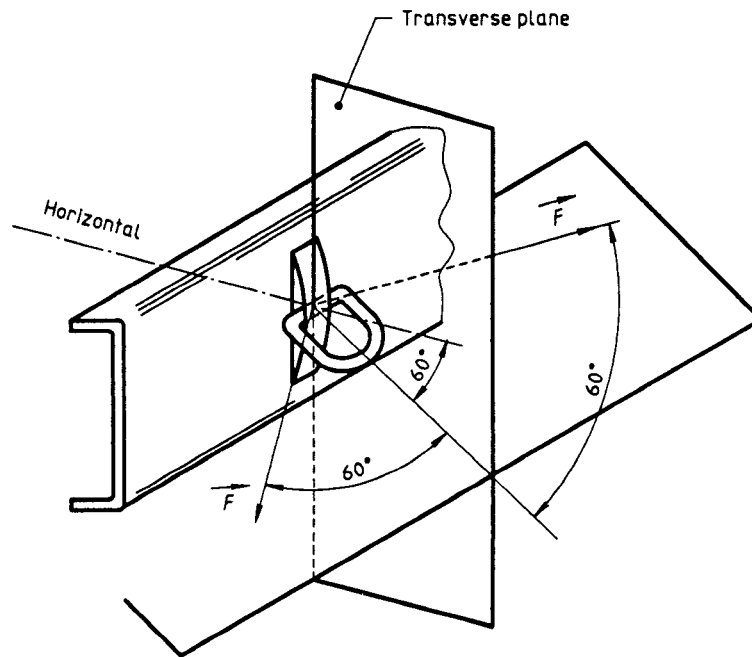


Figure 5 — Direction of application of test force

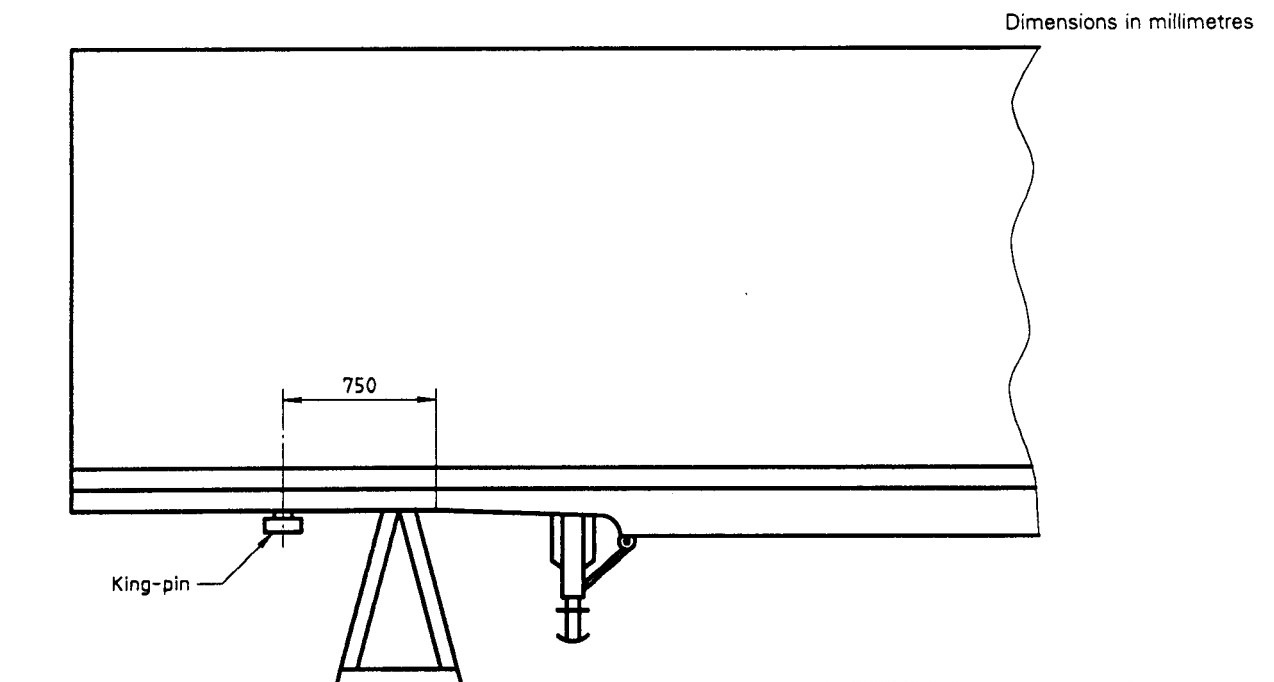


Figure 6 — Recommended range of trestle location