



SWEDISH  
STANDARDS  
INSTITUTE

# SVENSK STANDARD SS-ISO 11407:2005

Fastställd 2005-07-05

Utgåva 1

**Vägfordon – Mekanisk koppling mellan  
dragbilar, med koppling monterad fram och  
under, och släpfordon – Utbyttbarhet  
(ISO 11407:2004, IDT)**

**Commercial road vehicles – Mechanical coupling  
between towing vehicles, with coupling mounted  
forward and below, and centre-axle trailers –  
Interchangeability (ISO 11407:2004, IDT)**

ICS 43.040.70

Språk: engelska

Publicerad: augusti 2005

Den internationella standarden ISO 11407:2004 gäller som svensk standard. Detta dokument innehåller den officiella engelska versionen av ISO 11407:2004.

The International Standard ISO 11407:2004 has the status of a Swedish Standard. This document contains the official English version of ISO 11407:2004.

---

Upplysningar om **sakinnehållet** i standarden lämnas av SIS, Swedish Standards Institute, telefon 08 - 555 520 00.

Standarder kan beställas hos SIS Förlag AB som även lämnar **allmänna upplysningar** om svensk och utländsk standard.

*Postadress:* SIS Förlag AB, 118 80 STOCKHOLM  
*Telefon:* 08 - 555 523 10. *Telefax:* 08 - 555 523 11  
*E-post:* [sis.sales@sis.se](mailto:sis.sales@sis.se). *Internet:* [www.sis.se](http://www.sis.se)

# Contents

Page

Foreword .....	iv
Introduction .....	v
1 Scope .....	1
2 Interchangeability dimensions .....	1
2.1 Distance between drawbar coupling axis and rear end of towing vehicle .....	1
2.2 Turning front of trailer .....	2
2.3 Height of couplings .....	3
2.4 Drawbar contour .....	3
2.5 Rear end of towing vehicle .....	3
2.6 Angles of inclination and articulation .....	3
3 Possible combinations and marking .....	5
Annex A (informative) Classes of dimensions for $C_{min}$ .....	7
Annex B (informative) Vehicle combinations — Examples of configurations .....	8
Bibliography .....	9

## SS-ISO 11407:2005

### Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 11407 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 15, *Interchangeability of components of commercial vehicles and buses*.

This second edition cancels and replaces the first edition (ISO 11407:1993), which has been technically revised.

## **Introduction**

In many countries, the total length of road trains is limited by law. In view of the increasing demand for large-volume transports, vehicle manufacturers have developed solutions for optimizing the loading space of road trains within the legal specification. Centre-axle trailers are a well-proven means of reducing the necessary free space between towing vehicles and trailer, thereby increasing loading space while keeping within legal limitations.

New demands, wider usage and further development of the concept have lead to further changes. To increase the volume even more, lower vehicle chassis have been developed. There is also a growing demand for extra equipment in the overhang, such as retractable tail lift and additional drawbar coupling fitted in the end of the chassis frame.

In order to prevent interference between the drawbar and this extra equipment, specifically on low chassis, it has become necessary to introduce a new, "low" class of drawbar profile.

A new category of road train (25,25 m) has been introduced in Finland and Sweden, the intention being that it will be possible to couple vehicles conforming with this International Standard to combinations of more than one trailer. Consequently, this edition of ISO 11407 is applicable to drawbar and drawbar coupling positions on those road trains, as well.



# Commercial road vehicles — Mechanical coupling between towing vehicles, with coupling mounted forward and below, and centre-axle trailers — Interchangeability

## 1 Scope

This International Standard specifies the interchangeability requirements of the various elements and dimensions for the mechanical coupling of towing vehicles whose coupling is mounted forward and below to centre-axle trailers. It is applicable to road trains for the commercial transport of low-density, high-volume cargo of the greatest possible variety. It is also applicable to corresponding equipment in cases where the same vehicle makes up part of a road train having more than one trailer. It is not applicable to dedicated or special combinations such as coupling systems with an extensible drawbar; nor does it specify limitations on maximum gross mass and overall dimensions, which are generally laid down by legislative requirements. Vehicle combinations whose couplings form the subject of this International Standard (see Annex B for examples) are not interchangeable with those whose couplings are rear-mounted (see ISO 11406).

## 2 Interchangeability dimensions

### 2.1 Distance between drawbar coupling axis and rear end of towing vehicle

The distance,  $A$ , between the drawbar coupling axis and the rear end of the towing vehicle (see Figures 1 and 2) shall be in accordance with Table 1. Since dimension  $A$  always exceeds 420 mm, a device that enables coupling actuation at a maximum distance of 420 mm from the outer border of the body shall be used.

Dimensions in millimetres

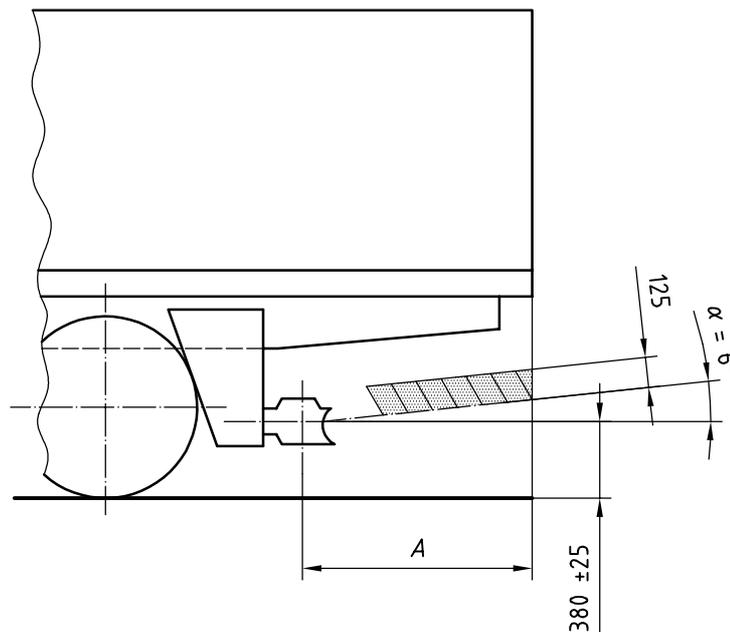


Figure 1 — High class — Rear end of towing vehicle

Dimensions in millimetres

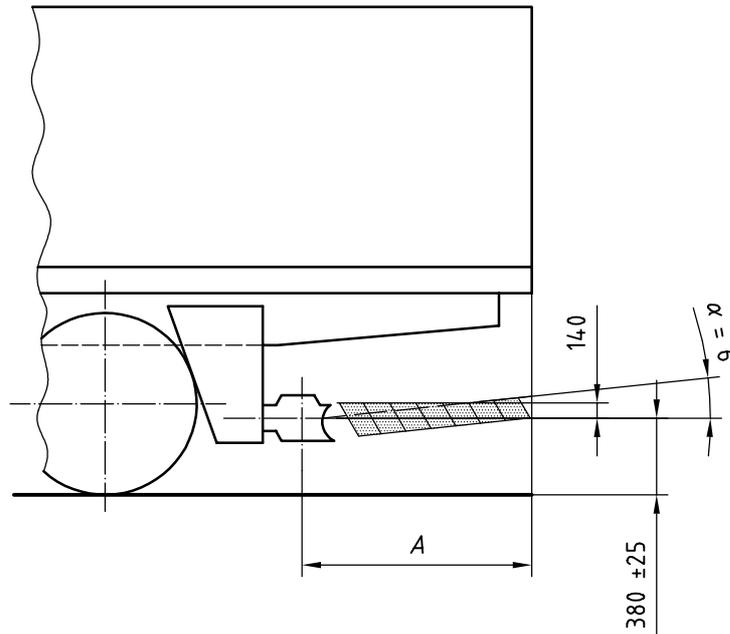


Figure 2 — Low class — Rear end of towing vehicle with tail lift or other extra equipment added

Table 1 — Distance, *A*, between drawbar coupling axis and rear end of towing vehicle

Dimensions in millimetres

Class designation, low/high	<i>A</i> 0 -100
1 400	1 400
1 600	1 600
1 900	1 900

## 2.2 Turning front of trailer

The turning front of the trailer, *C* (see Figure 3), is the distance between the drawbar coupling axis and the front of the trailer.

The minimum value of *C* in a vehicle combination, expressed in millimetres, is determined by the equation:

$$C_{\min} = \sqrt{\left(\frac{W}{2}\right)^2 + A^2} + S$$

where

*W* is the towing vehicle width, expressed in millimetres;

*A* is the distance, expressed in millimetres, between the drawbar coupling axis and the rear end of the towing vehicle;

*S* is the minimum clearance, expressed in millimetres, between the turning circles of the towing vehicle and the trailer.