

SVENSK STANDARD

SS-ISO 20515:2021

Rullningslager – Radiallager, låsningsspår – Dimensioner, geometriska produktspecifikationer (GPS) och toleransvärden (ISO 20515:2021, IDT)

Rolling bearings — Radial bearings, retaining slots — Dimensions, geometrical product specifications (GPS) and tolerance values (ISO 20515:2021, IDT)



sis Svenska
Institutet för
Standarder

Language: engelska/English

Edition: 1

This preview is downloaded from www.sis.se. Buy the entire standard via <https://www.sis.se/std-80031368>

Den här standarden kan hjälpa dig att effektivisera och kvalitetssäkra ditt arbete. SIS har fler tjänster att erbjuda dig för att underlätta tillämpningen av standarder i din verksamhet.

SIS Abonnemang

Snabb och enkel åtkomst till gällande standard med SIS Abonnemang, en prenumerationstjänst genom vilken din organisation får tillgång till all världens standarder, senaste uppdateringarna och där hela din organisation kan ta del av innehållet i prenumerationen.

Utbildning, event och publikationer

Vi erbjuder även utbildningar, rådgivning och event kring våra mest sålda standarder och frågor kopplade till utveckling av standarder. Vi ger också ut handböcker som underlättar ditt arbete med att använda en specifik standard.

Vill du delta i ett standardiseringsprojekt?

Genom att delta som expert i någon av SIS 300 tekniska kommittéer inom CEN (europeisk standardisering) och/eller ISO (internationell standardisering) har du möjlighet att påverka standardiseringsarbetet i frågor som är viktiga för din organisation. Välkommen att kontakta SIS för att få veta mer!

Kontakt

Skriv till kundservice@sis.se, besök [sis.se](https://www.sis.se) eller ring 08 - 555 523 10

© Copyright/Upphovsrätten till denna produkt tillhör Svenska institutet för standarder, Stockholm, Sverige. Upphovsrätten och användningen av denna produkt regleras i slutanvändarlicensen som återfinns på [sis.se/slutanvandarlicens](https://www.sis.se/slutanvandarlicens) och som du automatiskt blir bunden av när du använder produkten. För ordlista och förkortningar se [sis.se/ordlista](https://www.sis.se/ordlista).

© Copyright Svenska institutet för standarder, Stockholm, Sweden. All rights reserved. The copyright and use of this product is governed by the end-user licence agreement which you automatically will be bound to when using the product. You will find the licence at [sis.se/enduserlicenseagreement](https://www.sis.se/enduserlicenseagreement).

Upplysningar om sakinnehållet i standarden lämnas av Svenska institutet för standarder, telefon 08 - 555 520 00. Standarder kan beställas hos SIS som även lämnar allmänna upplysningar om svensk och utländsk standard.

Standarden är framtagen av kommittén för Rullningslager, SIS/TK 105.

Har du synpunkter på innehållet i den här standarden, vill du delta i ett kommande revideringsarbete eller vara med och ta fram andra standarder inom området? Gå in på www.sis.se - där hittar du mer information.

Den internationella standarden ISO 20515:2021 gäller som svensk standard. Detta dokument innehåller den officiella engelska versionen av ISO 20515:2021.

The International Standard ISO 20515:2021 has the status of a Swedish Standard. This document contains the official English version of ISO 20515:2021.

LÄSANVISNINGAR FÖR STANDARDER

I dessa anvisningar behandlas huvudprinciperna för hur regler och yttre begränsningar anges i standardiseringsprodukter.

Krav

Ett krav är ett uttryck i ett dokumentets innehåll som anger objektivet verifierbara kriterier som ska uppfyllas och från vilka ingen avvikelse tillåts om efterlevnad av dokumentet ska kunna åberopas. Krav uttrycks med hjälpverbet ska (eller ska inte för förbud).

Rekommendation

En rekommendation är ett uttryck i ett dokumentets innehåll som anger en valmöjlighet eller ett tillvägagångssätt som bedöms vara särskilt lämpligt utan att nödvändigtvis nämna eller utesluta andra. Rekommendationer uttrycks med hjälpverbet bör (eller bör inte för avrådanden).

Instruktion

Instruktioner anges i imperativ form och används för att ange hur något görs eller utförs. De kan underordnas en annan regel, såsom ett krav eller en rekommendation. De kan även användas självständigt, och är då att betrakta som krav.

Förklaring

En förklaring är ett uttryck i ett dokumentets innehåll som förmedlar information. En förklaring kan uttrycka tillåtelse, möjlighet eller förmåga. Tillåtelse uttrycks med hjälpverbet får (eller motsatsen behöver inte). Möjlighet och förmåga uttrycks med hjälpverbet kan (eller motsatsen kan inte).

READING INSTRUCTIONS FOR STANDARDS

These instructions cover the main principles for the use of provisions and external constraints in standardization deliverables.

Requirement

A requirement is an expression, in the content of a document, that conveys objectively verifiable criteria to be fulfilled, and from which no deviation is permitted if conformance with the document is to be claimed. Requirements are expressed by the auxiliary shall (or shall not for prohibition).

Recommendation

A recommendation is an expression, in the content of a document, that conveys a suggested possible choice or course of action deemed to be particularly suitable, without necessarily mentioning or excluding others. Recommendations are expressed by the auxiliary should (or should not for dissuasion).

Instruction

An instruction is expressed in the imperative mood and is used in order to convey an action to be performed. It can be subordinated to another provision, such as a requirement or a recommendation. It can also be used independently and is then to be regarded as a requirement.

Statement

A statement is an expression, in the content of a document, that conveys information. A statement can express permission, possibility or capability. Permission is expressed by the auxiliary may (its opposite being need not). Possibility and capability are expressed by the auxiliary can (its opposite being cannot).

Contents

Page

Foreword	vi
Introduction	vii
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Graphical description	2
5 Dimensions	4
5.1 General.....	4
5.2 Dimensions for single-row angular contact ball bearings and four-point-contact ball bearings.....	4
5.3 Dimensions for radial cylindrical roller bearings.....	6
6 Tolerance values	7
6.1 General.....	7
6.2 Tolerance values for retaining slots.....	7
Annex A (informative) Example of drawing indications of characteristics with specification for retaining slot	10
Annex B (informative) Application example for a retaining slot	11
Bibliography	12

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 4, *Rolling bearings*, Subcommittee SC 12, *Ball bearings*.

This third edition cancels and replaces the second edition (ISO 20515:2012), which has been technically revised.

The main changes compared to the previous edition are as follows:

- the title has been updated;
- the geometrical product specification (GPS) has been modified;
- the specification for the location of the retaining slot's bottom surface has been changed from a distance to a position specification, whereas the tolerance values have to be recalculated and rounded;
- the structure of the tables has been revised.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Introduction

This document is a machine element geometry standard as defined in the geometrical product specification system (GPS system) as presented in matrix model of ISO 14638^[5].

The fundamental rules of ISO GPS given in ISO 8015^[2] apply to this document and the default decision rules given in ISO 14253-1^[3] apply to specifications made in accordance with this document, unless otherwise indicated.

The connection between functional requirements, measuring technique, and measuring uncertainty is always intended to be considered. For measurement uncertainty, it is intended that ISO 14253-2^[4] should be considered.

Rolling bearings — Radial bearings, retaining slots — Dimensions, geometrical product specifications (GPS) and tolerance values

1 Scope

This document specifies dimensions and tolerances of retaining slots to be used for outer rings of single-row angular contact ball bearings, four-point-contact ball bearings and radial cylindrical roller bearings.

The retaining slots are not suitable for use in the outer rings of sealed and shielded radial ball bearings, nor in the outer rings of radial cylindrical roller bearings without ribs.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirement of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 15, *Rolling bearings — Radial bearings — Boundary dimensions, general plan*

ISO 1101, *Geometrical product specifications (GPS) — Geometrical tolerancing — Tolerances of form, orientation, location and run-out*

ISO 5593, *Rolling bearings — Vocabulary*

ISO 14405-1, *Geometrical product specifications (GPS) — Dimensional tolerancing — Part 1: Linear sizes*

ISO 15241, *Rolling bearings — Symbols for physical quantities*

ISO 22872¹⁾, *Rolling bearings — Geometrical product specifications (GPS) — Symbols, terms and definitions associated with GPS*

3 Terms and definitions

For the purpose of this document the terms and definitions given in ISO 15, ISO 1101, ISO 5593, ISO 14405-1, ISO 15241, ISO 22872 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

3.1

retaining slot

angled slot in an outer ring at the intersection of the outside surface and the face of the ring

Note 1 to entry: See [Figures 1](#) and [2](#); also outline illustration in ISO 5593:2019, Figure 155.

Note 2 to entry: The purpose of the slot is to provide a simple means of preventing rotation of the outer ring of a bearing in relation to the application where it is mounted.

[SOURCE: ISO 5593:2019, 3.2.2.25, modified — "See Figures 1 and 2; also outline illustration in" was added in Note 1 to entry.]

1) Under preparation. Stage at the time of publication: ISO/DIS 22872:2021.

SS-ISO 20515:2021 (E)

3.2

b

nominal retaining slot width

3.2.1

$\Delta b g$

lower limit deviation of a maximum inscribed size of retaining slot width

Note 1 to entry: The term “deviation” is defined in ISO 286-1:2010 [1], 3.2.4 and the term “maximum inscribed size” is defined in ISO 14405-1:2016, 3.7.1.2.

3.2.2

$\Delta b s$

upper limit deviation of two-point size of retaining slot width

Note 1 to entry: The term “deviation” is defined in ISO 286-1:2010 [1], 3.2.4 and the term “two-point size” is defined in ISO 14405-1:2016, 3.6.1.

3.3

PS2

position specification of retaining slots median planes with respect to the axis established from the outer ring outside surface

Note 1 to entry: The position specification of a median plane is specified in ISO 1101:2017, 17.13.4.

3.4

D

nominal bearing outside diameter

[SOURCE: ISO 15241:2012, 2.17]

3.5

h

nominal distance between the side face of outer ring and the intersection between the bottom surface of the retaining slot and the outer ring outside surface

3.6

PS1

position specification of retaining slot bottom surface with respect to the axis established from the outer ring outside surface and the outer ring side face

Note 1 to entry: The position specification of a planar surface is specified ISO 1101:2017, 17.13.5.

3.7

r 0

fillet radius at bottom of retaining slot

Note 1 to entry: The lower limit of r_0 should not be 0 and shall be appropriately dimensioned to avoid stress concentrations. Indicated values are tolerance values. This is expressed in [Figures 1](#) and [2](#) by $r_0 \text{ max}$. In technical drawings this is expressed by e.g. 0,5 max.

4 Graphical description

To express that the ISO GPS system, ISO 8015[2], is applied, the dimensional and geometrical characteristics shall be included in the technical product documentation (for example, on the drawing). The dimensional and geometrical specifications associated to these characteristics are described in [Figure 1](#) and [Figure 2](#).

The ISO/TC 4 symbols in context with tolerance values, deviation limits and limit values shall be preceded by letter “*t*” in figures and tables. The letter “*t*” is written in italic font. The symbol group shall be subscripted to “*t*” with all symbols in upright font.

EXAMPLE $t_{\Delta bs}$

For values of upper/lower limit of size the letter “*t*” shall not be indicated, because in the ISO/TC 4 context those values are usually interpreted as nominal dimensions.

According to ISO 8015 specifications shall be completed with specification operators, e.g. filtration. These may be agreed between manufacturer and customer case by case.

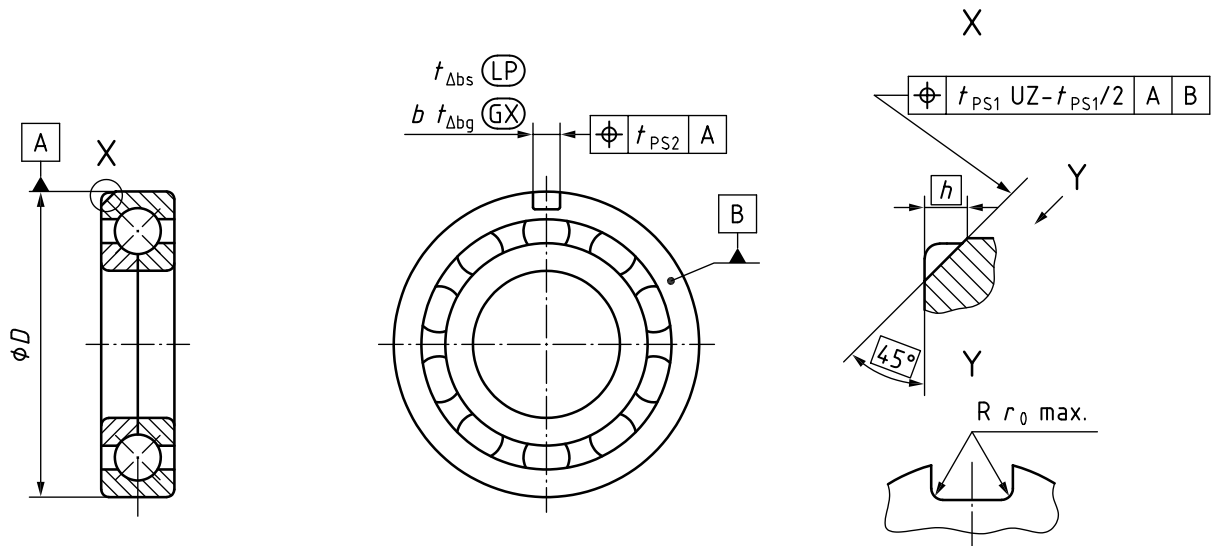


Figure 1 — Radial bearing with one retaining slot

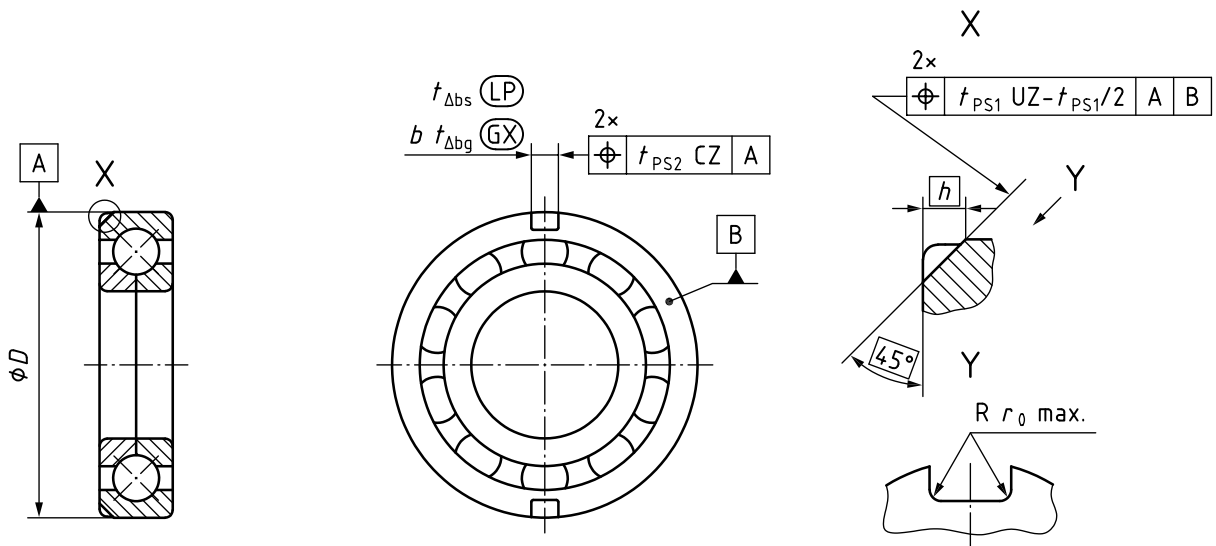


Figure 2 — Radial bearing with two diametrically opposed retaining slots

NOTE [Figures 1](#) and [2](#) show four-point-contact ball bearings with one retaining slot and two retaining slots, respectively. They are also appropriate for the other bearing types given in the scope.

For an example of drawing indications of characteristics with specification for retaining slot see [Annex A](#). For an application example for a retaining slot, see [Annex B](#).